




## Features

SMS-200 is a compact designed high performance network file player which is capable to share and play music file through network system. It has the following features.

- Web GUI
  - Easy system configuration
  - Selectable music player applications
  - Selectable and configurable USB audio devices
  - Network share folder and USB storage device setting
- Roon Ready
- DLNA audio renderer, OpenHome support
- MPD(Music Player Daemon)
- LMS(Logitech Media Server)
- Squeezelite
- HQPlayer Network Audio Adapter
- Shairport
- Multi-zone network playback
- USB audio output
  - 1 x High-End audio grade USB port
  - 2 x Standard USB ports for USB storage device



- Power and status indicator lamp: The lamp illuminates when the unit is powered ON and blinks according to its operational status.
- Operating indicator lamp: The lamp blinks according to its operational status.

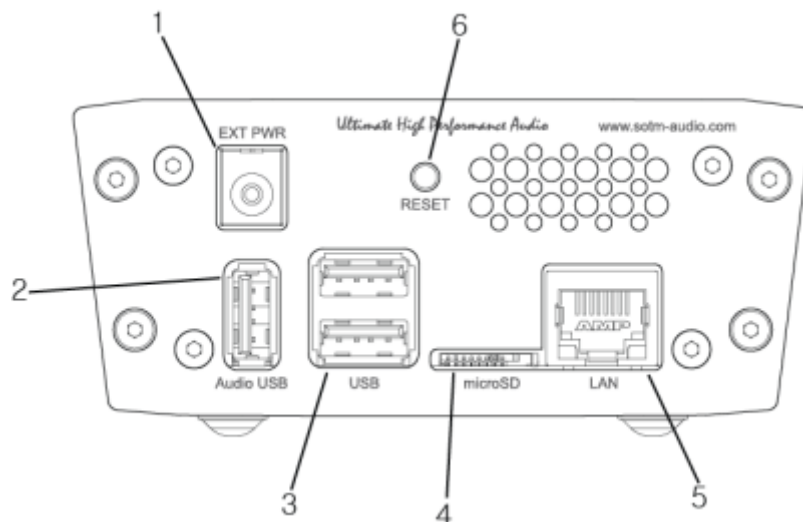

- Power input jack : Connect to a power supply.
- High-End audio grade USB port : Connect to USB audio device.
- USB 2.0 port : Connect to USB storage device.
- microSD card connector : The micro SD card which the product OS is loaded on is inserted.
- Caution: do not pull out the micro SD card while the unit is powered on. Product might be damaged.
- LAN port : Connect to a router by network cable.
- Reset switch : Reset the product by force.

## Quick Start

### 1. Installation

1. Take out sMS-200 from the product box and put it on the proper place.
2. The unit should be at least 5 cm(2 inch) away from the wall or other devices.

### 2. Connecting to audio system

1. By USB cable, connect the High-End audio grade USB port on the rear panel of SMS-200 to

USB audio device.

3. Connecting to network
  1. By Ethernet cable, connect the LAN port on the rear panel of SMS-200 to a router.
  2. A gigabit speed router and above CAT6 Ethernet cable are highly recommended to make stable network connection.
4. Connecting to power
  1. Connect to the power input jack on the rear panel of SMS-200 by the power cable from the power supply.
5. Preparing the server devices.
  1. To use Roon Ready on SMS-200, Roon Server should be on the same network.
  2. To use DLNA renderer on SMS-200, DLNA server and DLNA control point should be on the same network.
  3. To use MPD or Logitech Media Server, connect the USB storage device to the USB 2.0 port on the rear panel of SMS-200 or setup network music folder path on Library config page.
6. Power on
  1. Connect AC power to the power supply to power on the SMS-200.

## How to use Eunhasu Web GUI

### Connection

Open the web browser on a PC or smart device and connect to <http://eunhasu> . On MAC OSX, connect to <http://eunhasu.local> . You can get Eunhasu device's IP address or link from <http://sotm-audio.com/my> if you're using Android device. If either of above paths would not make connection to Eunhasu Web GUI, check the router setup to find out the IP address of SMS-200. And then enter SMS-200 IP address like <http://xxx.xxx.xxx.xxx> directly on the browser to connect to Eunhasu Web GUI. If you still couldn't access the Eunhasu Web GUI, you will need to check network status or power connection is okay. If you connect to Eunhasu Web GUI successfully, you will see the home screen as like the image below.



## Select functions

To select the function on the Web GUI, mouse over the desired icon and then action buttons will be appeared. On the smart devices, touch over the desired player icon and then the action buttons will be appeared like when using a mouse.



## Roon Ready

Roon Ready is the easy and user friendly network music file player working with Roon Server, it provides the most powerful music playback function. By clicking Play, Stop, Restart or Configuration buttons over the icon, you can control Roon Ready on SMS-200. Please refer to how to use Roon Ready on this manual.

## SqueezeLite

SqueezeLite is a network music file player working with Logitech Media Server, it is integrated with versatile services such as Tidal, Qobuz or internet radios. By clicking Play, Stop, Open LMS web interface, Restart or Configuration buttons over the icon, you can control SqueezeLite on SMS-200. Please refer to how to use SqueezeLite on this manual.

## MPD & DLNA

MPD is a music file player supports playing the music file saved on USB storage device or network share folder. And DLNA is a DLNA audio renderer working with DLNA server and DLNA control point throughout MPD function. It is capable to play music files with various devices like most PC, NAS or smart devices which have the DLNA server function. By clicking Play, Stop, Restart or Configuration buttons over the icon, you can control MPD & DLNA on SMS-200. Please refer to how to use MPD & DLNA on this manual.

## HQPlayer NAA



## Shairport




## System Setup

Network configuration, library configuration, system upgrade, restart and power off functions are available on this icon.

### Network Config

Set up the SMS-200 Network configuration.

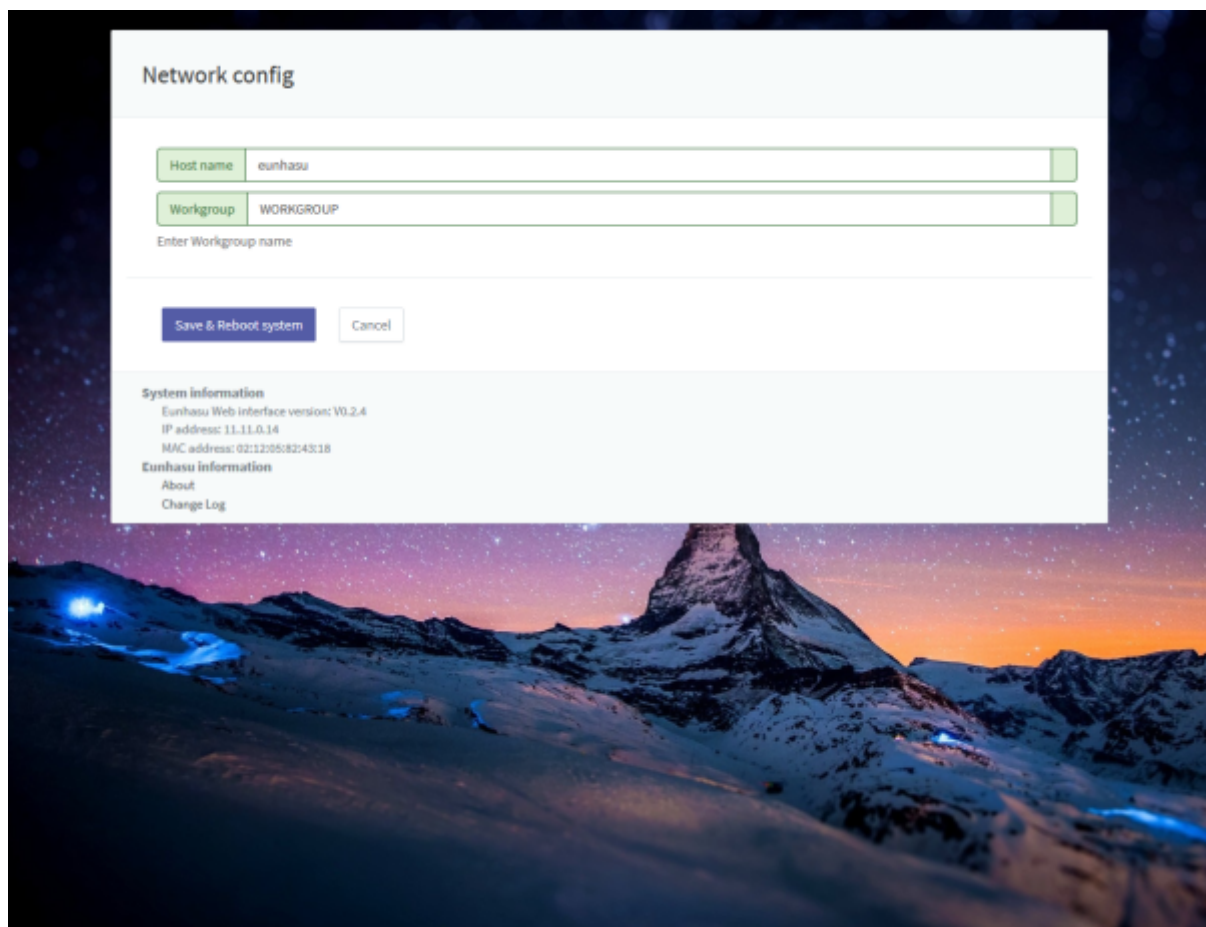

- Host name: A name of SMS-200 appearing on the network. If you use multiple SMS-200s on the

network, you will need to use different host name for each SMS-200.

- Workgroup: A workgroup name for share folder on the network, normally "WORKGOU" is used, but can change if required.
- Save & Reboot system: Save the information and reboot the product
- Cancel: Go back to the home screen.

## Library Config

Set up the path for network library and enable the USB storage device to use.



- NAME: A library folder name appearing on Logitech Media Server or MPD.
- PATH: A network sharing folder path. The path should be like following format.


◦ //SERVER\_NAME\_OR\_IP/SHARED\_FOLDER\_NAME

- ID: Enter an ID if it is required to access the network sharing folder.
- PW: Enter a password if it is required to access the network sharing folder.
- Save & Use: Save the information you entered and use.
- Save: Save the information you entered but not in use.
- Remove: Remove the information you entered.
- Automatic USB storage mount: Enable or disable the USB storage device, up to 2 USB storage devices can be used.
- Check 'Automatic USB storage mount' to be enabled, the USB storage device will be auto-recognized and assign music folder on Logitech Media Server or MPD as USB1 or USB2.
- Save changes: Save the new or modified information you entered.

- NOTE: The new network share folder information can be added after saving the current entered information.
- Cancel: Go back to the home screen.


## System Upgrade

Upgrade SMS-200 software.

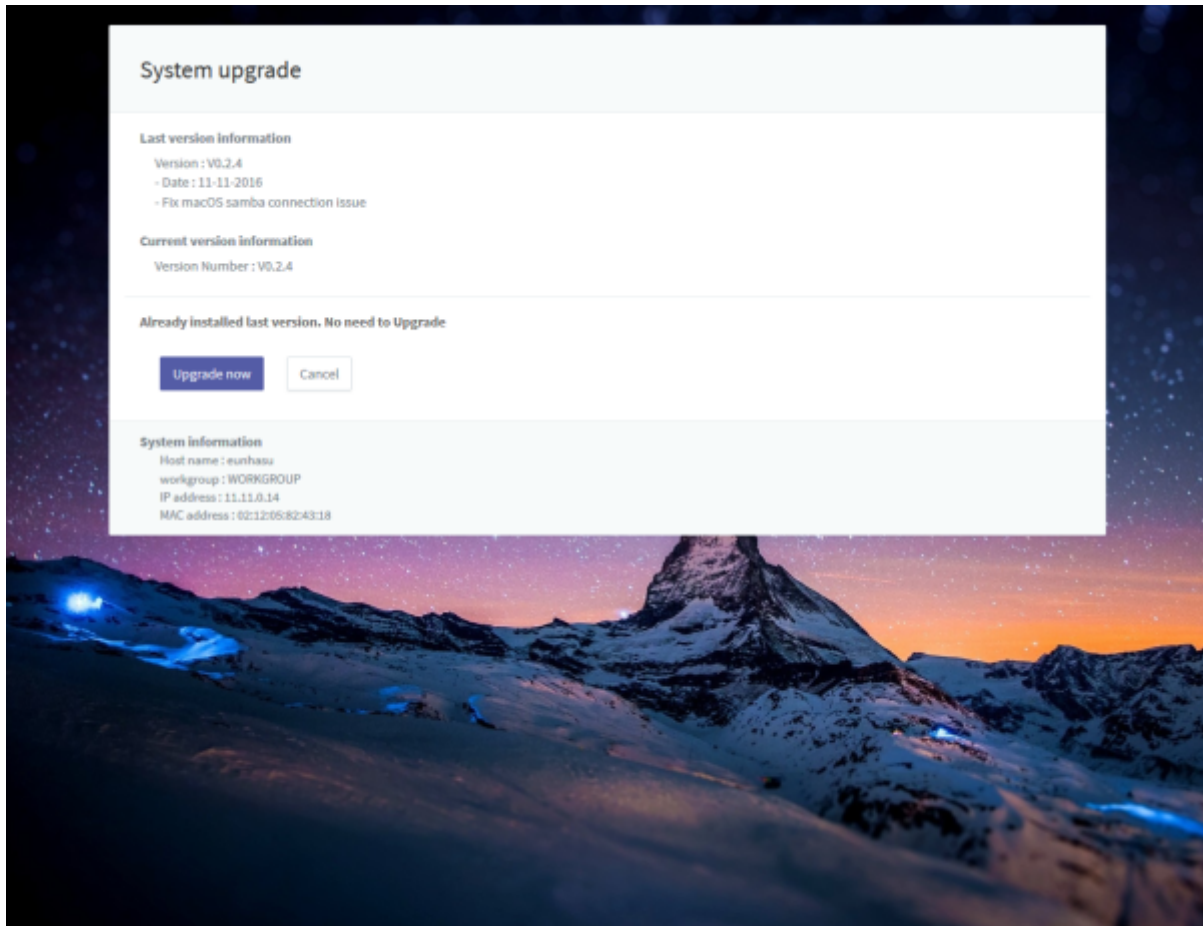

- Last version information: Display the latest software information.
- Current version information: Display the current software information in use.
- Already installed last version. No need to Upgrade: Display whether the upgrade is needed or not by comparing the version of the latest software and current software you are currently using. If the upgrade is needed, it will display as “Upgrade will stop all applications and take a long time”.
- Upgrade now: It stops all program and upgrade the software.
  - CAUTION: The upgrade may require a long time, the power should be on in the mean time upgrading.
- Cancel: Go back to the home screen.

If you have to upgrade mandatory, Eunhasu shows pop-up window to notify.

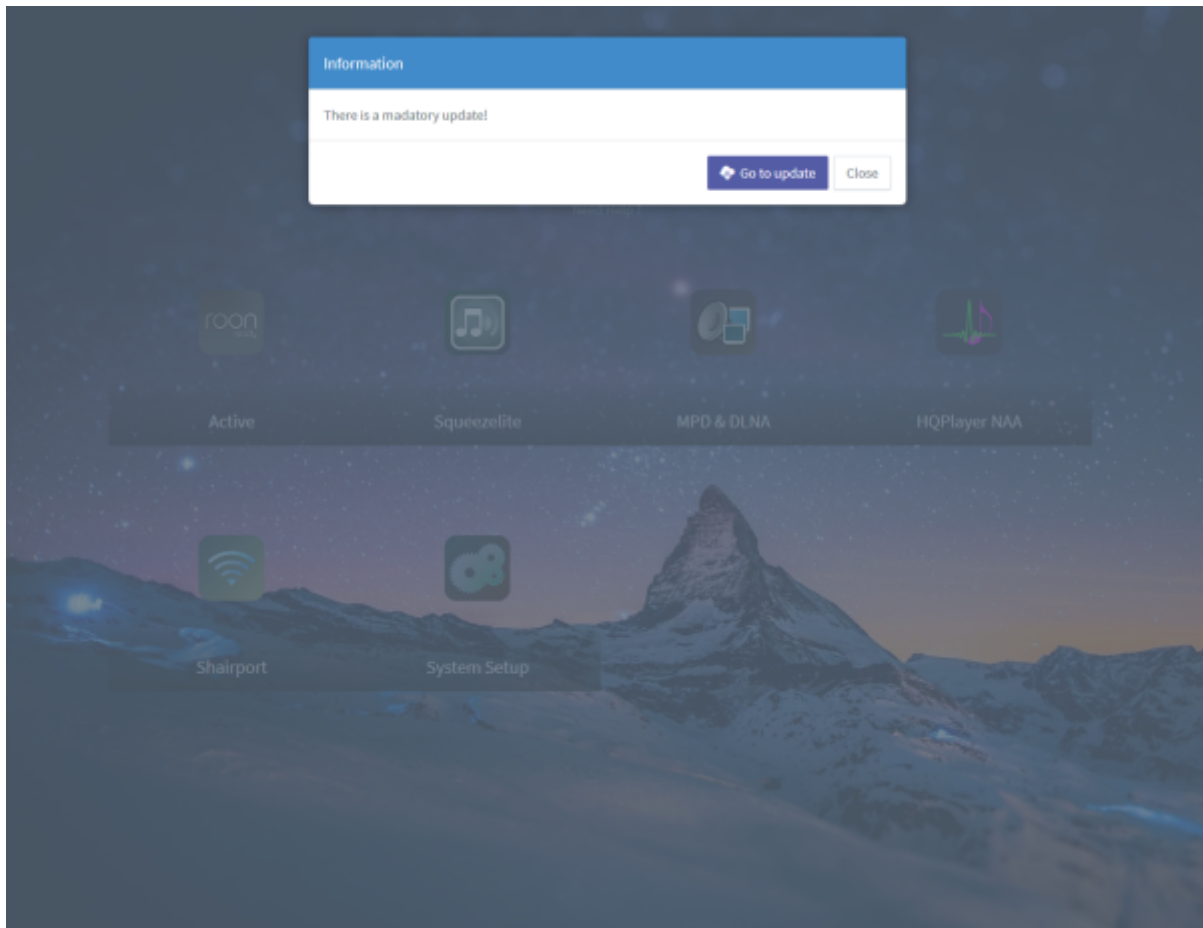

## How to use Roon Ready

Mouse over the Roon Ready icon and then the action buttons will appear. On the smart devices, touch over the Roon Ready icon and then the action buttons will appear like when using a mouse. By using the action buttons, you can start, stop, restart or configure Roon Ready.



## Start Roon Ready

▶ Click start button to start Roon Ready. 'Active' sign will be displaying under the Roon Ready icon once Roon Ready is started and running.

## Stop Roon Ready

■ Click stop button to stop Roon Ready.

## Restart Roon Ready

↻ Click restart button to stop and then start Roon Ready.

## Roon Ready Config

⚙️ Click config button to move to Roon Ready config screen.



- Audio device config: The config information of all USB DACs connected to sMS-200 is displaying.
  - The chosen USB DAC is displaying in the light green box with the selected radio button in front and other available USB DACs are displaying in the light blue box.
  - Select a radio button of USB DAC which is going to use and click 'Save changes' to use the USB DAC.
- DSD mode: Choose one of DSD playback mode among NONE, NATIVE, DOP, DCS, NATIVE / DOP, NATIVE / DCS which USB DAC can support.
- DSD rate: Choose one of DSD music file rate among x64, x128 or x256 which USB DAC can support.
- Buffer duration: Set up the buffer duration value. If music playback has any issue, need to adjust this value.
- Save changes : Save the information you entered or modified, and Roon Ready automatically will restart if Roon Ready is started and running.
- Cancel: Go back to the home screen.

## How to use Squeezelite

Mouse over the Squeezelite icon and the action buttons will appear. On the smart devices, touch over the Squeezelite icon and the action buttons will appear like when using a mouse. By using the action buttons, you can start, stop, Open LMS web interface, restart or configure Squeezelite.



## Start SqueezeLite

▶ Click start button to start SqueezeLite and Logitech Media Server. 'Active' sign will be displaying under the SqueezeLite icon once SqueezeLite is started and running. When starting SqueezeLite, it will take around 30 seconds because Logitech Media Server is also starting together.

## Stop SqueezeLite

■ Click stop button to stop SqueezeLite and Logitech Media Server.

## Restart SqueezeLite

🔄 Click restart button to stop SqueezeLite and Logitech Media Server and then restart.

## Open LMS Web interface

🖥️ Click open LMS web interface button to open LMS web remote control running on SMS-200 in the new browser and then you will be able to browse and play music file.

## Squeezelite Config

⚙️ ick config button to move to Squeezelite config screen.



- Name: A name of SMS-200's Squeezelite appearing on Logitech Media Server.
- Audio device config: The config information of all USB DACs connected to SMS-200 is displaying.
  - The chosen USB DAC is displaying in the light green box with the selected radio button in front and other available USB DACs are displaying in the light blue box.
  - Select a radio button of USB DAC which is going to use and click 'Save changes' to use the USB DAC.
- DOP or PCM convert: Check for using DOP function while playing DSD music file, uncheck for using DSD to PCM converting while playing DSD music file.
- Save changes: Save the information you entered or modified, and Squeezelite and Logitech Media Server will automatically restart if Squeezelite is started and running.
  - Restart will take around 30 seconds.
- Cancel: Go back to the home screen.

## How to use MPD & DLNA

Mouse over the MPD & DLNA icon and then the action buttons will appear. On the smart devices, touch over the MPD & DLNA icon and then the action buttons will appear like when using a mouse. By using the action buttons, you can start, stop, restart or configure MPD & DLNA.



## Start MPD & DLNA

▶ Click start button to activate MPD & DLNA. 'Active' sign will be displaying under the MPD & DLNA icon once MPD & DLNA is started and running.

## Stop MPD & DLNA


■ Click stop button to halt MPD & DLNA.

## Restart MPD & DLNA

🔄 Click restart button to stop MPD & DLNA and then restart.

## SqueezeLite Config

⚙️ Click config button to move to MPD & DLNA config screen.

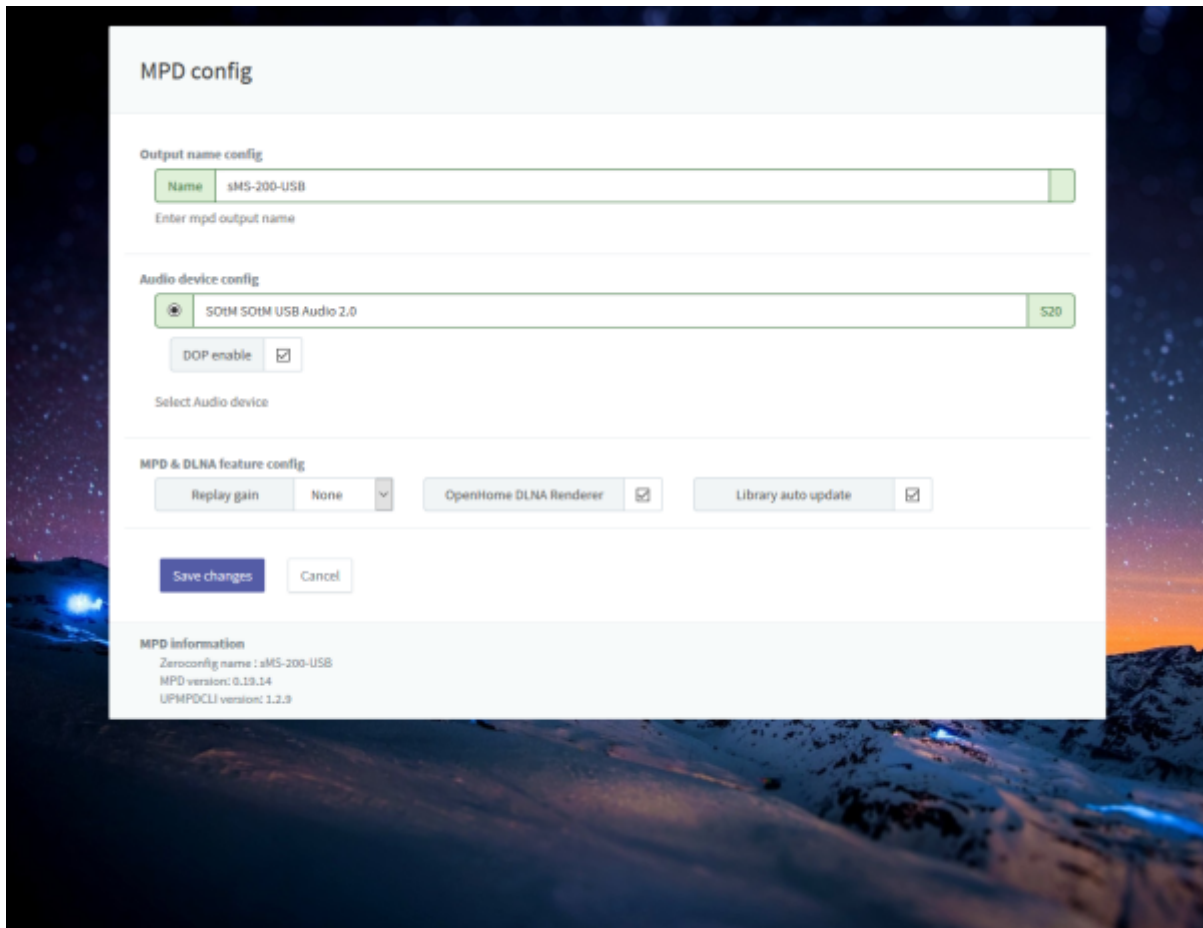

- Name: A name of SMS-200's MPD & DLNA appearing on MPD controlling App and DLNA controlling App.
- Audio device config: The config information of all USB DACs connected to SMS-200 is displaying.
  - The chosen USB DAC is displaying in the light green box with the selected radio button in front and other available USB DACs are displaying in the light blue box.
  - Select a radio button of USB DAC which is going to use and click 'Save changes' to use the USB DAC.
- DOP enable: Check for using DOP function while playing DSD music file.
- Replay gain: Choose Replay gain among None, Album or Track.
- OpenHome DLNA Renderer: Check for using OpenHome DLNA Renderer feature.
- Library auto update: Check for auto-scanning and updating the library.
- Save changes: Save the information you entered or modified, and MPD & DLNA will automatically restart if MPD & DLNA is started and running.
- Cancel: Go back to the home screen.

## How to use HQPlayer NAA

Mouse over the HQPlayer NAA icon and then the action buttons will appear. On the smart devices, touch over the HQPlayer NAA icon and then the action buttons will appear like when using a mouse. By using the action buttons, you can start, stop, restart or configure HQPlayer NAA.



## Start HQPlayer NAA

▶ Click start button to activate HQPlayer NAA. 'Active' sign will be displaying under the HQPlayer NAA icon once HQPlayer NAA is started and running.

## Stop HQPlayer NAA


■ Click stop button to halt HQPlayer NAA.

## Restart HQPlayer NAA

↻ Click restart button to stop HQPlayer NAA and then restart.

## HQPlayer NAA Config

⚙️ Click config button to move to HQPlayer NAA config screen.

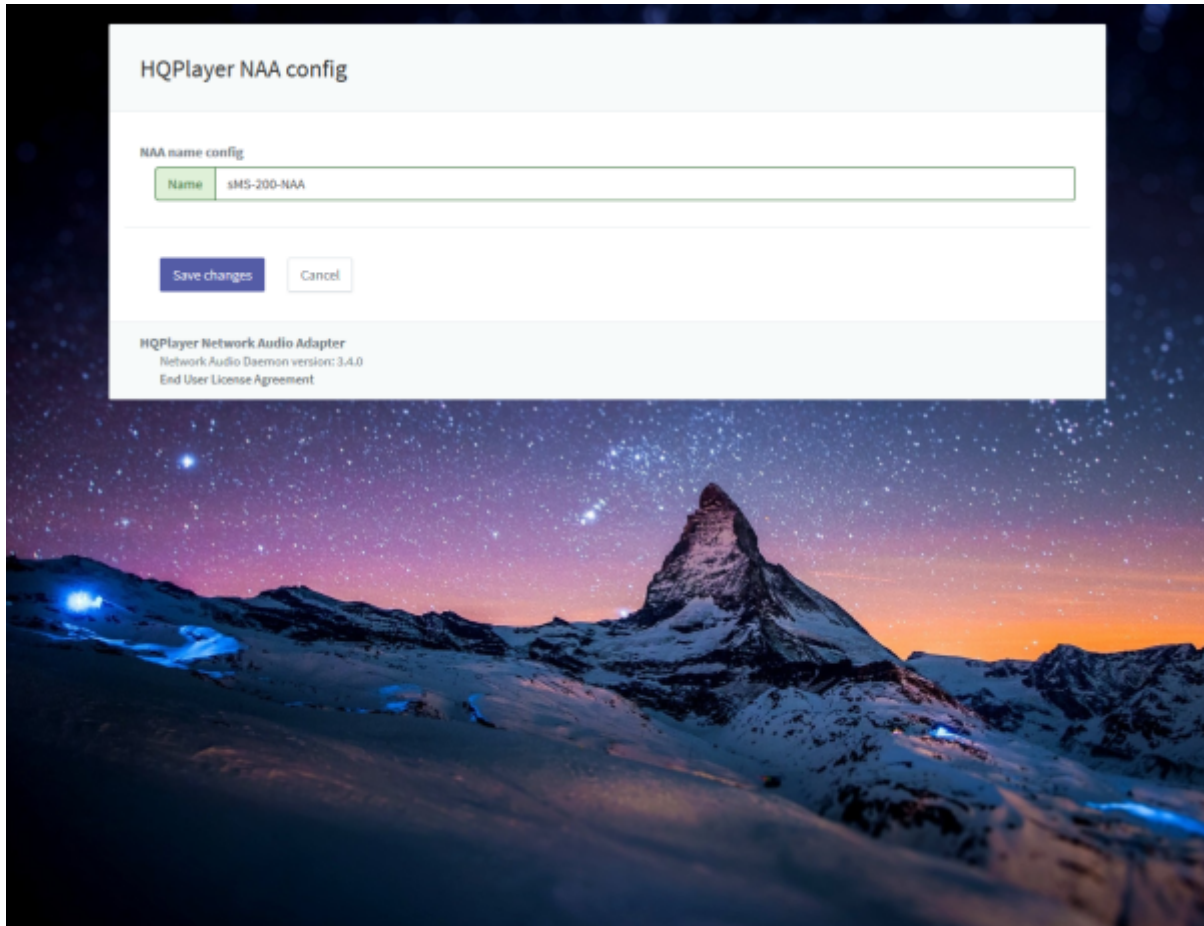

- Name: A name of SMS-200's HQPlayer NAA appearing on HQPlayer Desktop.
- Save changes: Save the information you entered or modified.
- Cancel: Go back to the home screen.

## How to use Shairport

Mouse over the Shairport icon and then the action buttons will appear. On the smart devices, touch over the Shairport icon and then the action buttons will appear like when using a mouse. By using the action buttons, you can start, stop, restart or configure Shairport.



## Start Shairport

▶ Click start button to activate Shairport. 'Active' sign will be displaying under the Shairport icon once Shairport is started and running.

## Stop Shairport


■ Click stop button to halt Shairport.

## Restart Shairport

↻ Click restart button to stop Shairport and then restart.

## Shairport Config

⚙️ Click config button to move to Shairport config screen.

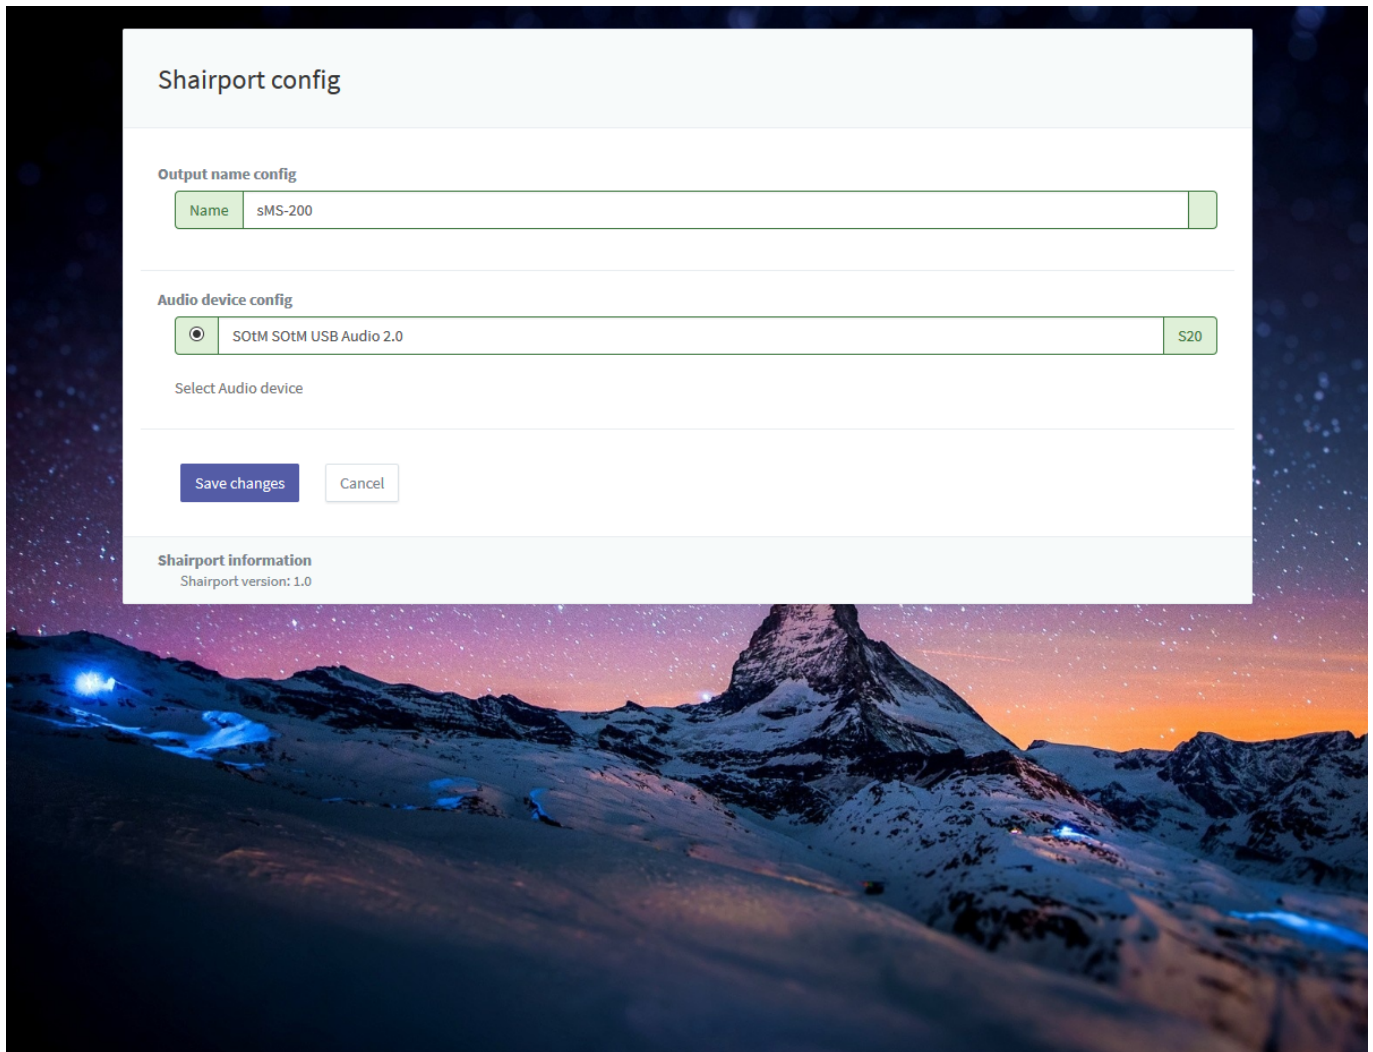

- Name: A name of SMS-200's Shairport appearing on Apple's iDevice.
- Audio device config: The config information of all USB DACs connected to SMS-200 is displaying.
  - The chosen USB DAC is displaying in the light green box with the selected radio button in front and other available USB DACs are displaying in the light blue box.
  - Select a radio button of USB DAC which is going to use and click 'Save changes' to use the USB DAC.
- Save changes: Save the information you entered or modified.
- Cancel: Go back to the home screen.

From:

<https://www.docs.sotm-audio.com/> - **SOTM docs**

Permanent link:

[https://www.docs.sotm-audio.com/doku.php?id=en:sms-200\\_operation\\_instructions&rev=1479172017](https://www.docs.sotm-audio.com/doku.php?id=en:sms-200_operation_instructions&rev=1479172017)

Last update: **2016/11/14 20:06**

