

# MPD / DLNA renderer

MPD USB

가 Eunhasu 'MPD / DLNA renderer' DLNA (DLNA audio renderer)  
가 DLNA , DLNA 가 DLNA  
MinimServer 'MPD / DLNA renderer'

MPD config

Output name config  
Name: SMS-200-USB  
Enter MPD output name

Audio device config  
Select Audio device and option. When you select Native DSD type 2, your DAC supports 32-bit DSD\_U32\_BE sample formats (e.g. XMOS based USB DACs and Marantz/Kenwood DACs). Type 0 is for using 8-bit DSD\_U8 format like the Botic driver for the BeagleBone Black.

MPD buffer config  
audio buffer size: 4096, buffer before play: 0, buffer time: 200000, period time: 5084  
Enter MPD buffer values

MPD & DLNA feature config  
Replay gain: None, OpenHome: , Library auto update: , Mixer type: software

Tidal streaming config  
ID or Email, Password, Quality: low  
Enter your Tidal ID&Password. And select Tidal streaming quality according to your account type, 'low' and 'high' are for Premium account and 'lossless' is for 'HIFI' account.

Qobuz streaming config  
ID or Email, Password, Format: normal  
Enter your Qobuz ID&Password. And select Qobuz streaming format, 'normal' is for mp3/210 and 'lossless' is for FLAC.

Save changes, Cancel, Uninstall

- **Name:** MPD DLNA 가
- **Audio device config:** USB DAC
- **DOP enable:** DSD DOP
- **Native DSD type 0:** 8-bit DSD\_U8 DAC ( , Botic BeagleBone Black)
- **Native DSD type 2:** 32-bit DSD\_U32\_BE DAC ( , XMOS USB DAC Marantz/Kenwood DAC)
- **Replay gain:** Replay gain None, Album, Track
- **OpenHome DLNA Renderer:** OpenHome DLNA Renderer
- **Library auto update:**
- **MPD Buffer config:** buffer
  - **Audio buffer size:**
  - **Buffer before play:** 가 가 . 0~100
  - **Buffer time:**
  - **Period time:**
  - **Buffer config** URL 가 <https://linux.die.net/man/5/mpd.conf>


- **Tidal streaming config:** mpd/dlna Tidal
  - . ID Password Tidal , Tidal
  - Quality . low/high Quality premium 가 , lossless
  - Quality HIFI 가 .
- **Qobuz streaming config:** mpd/dlna Qobuz
  - . ID Password Qobuz , Qobuz
  - Format . nomal mp3 가 , lossless FLAC
  - 가 .

 Native DSD V0.3.2 .

### MPD

- MPDroid: <https://play.google.com/store/apps/details?id=com.namelessdev.mpdroid>
- M.A.L.P. - MPD Client: <https://play.google.com/store/apps/details?id=org.gateshipone.malp>
- MPod: <https://itunes.apple.com/kr/app/mpod/id285063020?mt=8>
- MPDLuxe: <https://itunes.apple.com/us/app/mpdluxe/id991758069?mt=8>
- Gnome Music Player Client: <https://gmpclient.org/installation>
- Chimney: <https://www.microsoft.com/en-us/store/p/chimney/9wzdncrfj6jx>

: <http://mpd.wikia.com/wiki/Clients>

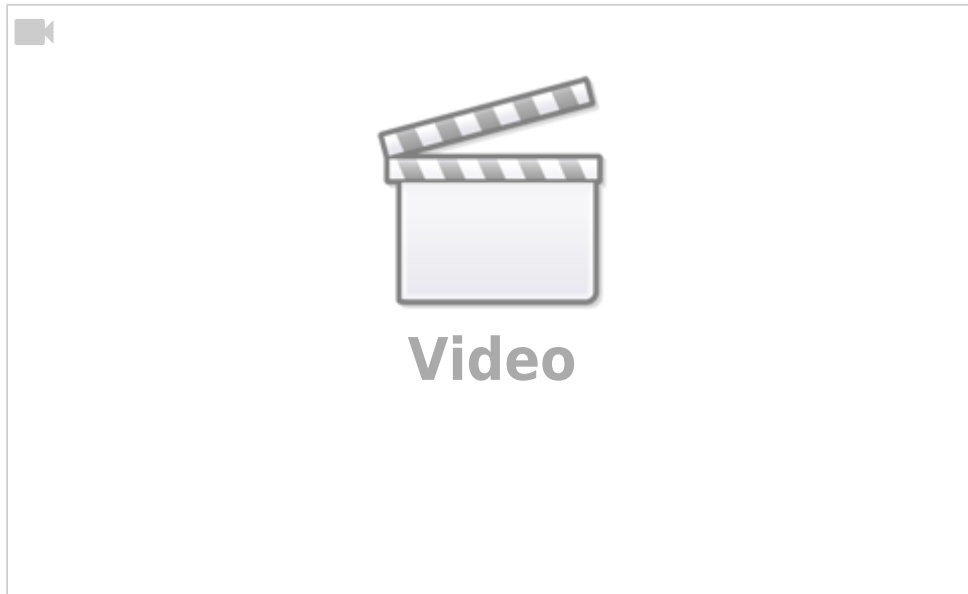

how to connect and access NAS in SMS-200



How to connect NAS to SqueezeLite or MPD/DLNA on SMS-200

---

: 2018/05/02 01:18

From:  
<https://docs.sotm-audio.com/> - **SOTM docs**

Permanent link:  
<https://docs.sotm-audio.com/doku.php?id=ko:mpd>

Last update: **2018/05/02 01:18**

