

Make the USB installation disk

Download the Eunhasu ISO image file


- [Eunhasu ISO image file]

Download Rufus program

- [Download Rufus V3.4](#)

Preparation

1. Prepare a 8GB(or above size) USB disk
2. Write in DD Image mode

 Rufus 3.4.1430

—

□

×

Drive Properties

Device

Multiple Partitions (E:) (F:) (G:) [7.9GB]

Boot selection

clonezilla-live-Eunhasu-V0.4.56-0.86_64-2019

✓

SELECT

Partition scheme

MBR

Target system

BIOS or UEFI

▼ Show advanced drive properties

Format Options

Volume label

Eunhasu-V0.4.56-0.86_64-2019_02

File system

FAT32 (Default)





Cluster size

4096 bytes (Default)

▼ Show advanced format options

Status


READY



START

CLOSE

Using image: clonezilla-live-Eunhasu-V0.4.56-0.86_64-2019_02.iso

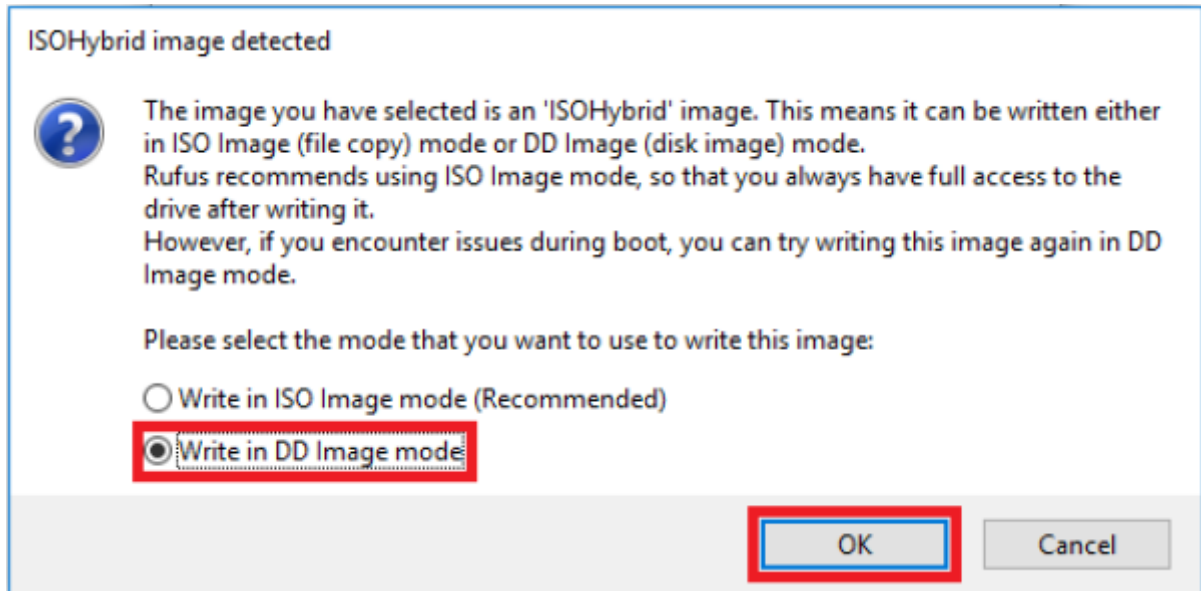

Install Eunhasu OS to the SMB-Q370

Connect the USB disk to the USB port of the SMB-Q370

Connect a LCD monitor by a HDMI cable to the SMB-Q370

Connect a USB keyboard to the SMB-Q370 and turn on the PC

Hit a F7 button continuously while booting to go to booting disk selection windows

Select the USB disk and continue booting

Select the first string in Clonezilla windows

Clonezilla live with img Eunhasu-V0.5.5_SMB-Q370_60G_2023-11-29-01-img (VGA 800×600)

Select the installation disk

1. if your disk is M.2(NVME) Disk, select nvme0n1 or nvme0n2
2. if your disk is SATA Disk, select sda or sdb

Select Y or hit Enter if asked whether to continue installations

Once finished installations, reboot the PC

Expand Partition

Login to Eunhasu console

(ID: root / P/W: sotmaudio)

Once Logged in, enter "mc" to continue

Access to /root/install folder

1. if you use M.2(NVME) Disk, run setup_nvme.sh file.
2. if you use SATA Disk, run setup_sata.sh file.

Reboot the sMB-Q370 PC

From:

<https://www.docs.sotm-audio.com/> - **SOtM docs**

Permanent link:

<https://www.docs.sotm-audio.com/doku.php?id=intalling&rev=1702527184>



Last update: **2023/12/13 23:13**